


1/3

FIG. 1

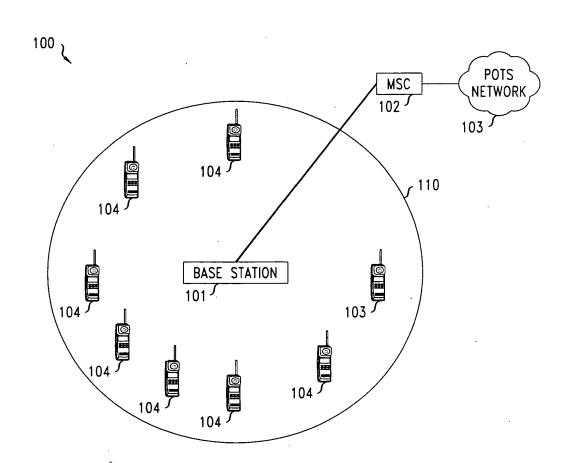

2/3

FIG. 2





FIG. 3



3/3

FIG. 4




FIG. 5

500

MSG LEN	MSG ID	POWER RELATED	SUPPORTED RATES	 REVERSE CHANNEL	 CRC	
501	502	503	504 ^{<i>f</i>}	505 [/]	506 ^{<i>f</i>}	

FIG. 6

<u>505</u>

E _c /I _o	I ô	E _c /I _o	I ô	RE-PROBE
19200	19200	38400	38400	OFFSET
601 ^f	602	603	604	605